


# X'Store<sup>®</sup>

**Optimise access  
and management of your materials,  
tools and consumables, in real time,  
to improve productivity, traceability  
and availability.**

- 1** Save time and gain unrestricted access to all your equipment and tools.
- 2** Keep control and monitor the condition of your equipment fleet, **everywhere, all the time.**
- 3** Reduce industrial risks while gaining greater autonomy and agility on a day-to-day basis.

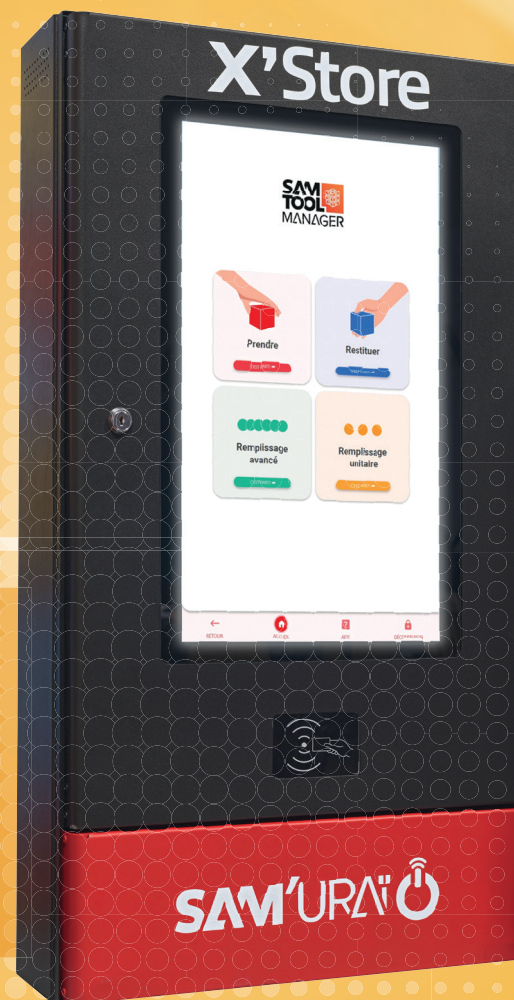

**EVERYTHING  
I NEED,  
WHEN  
I NEED IT!**

**SAM'URAI** <sup>®</sup>  
UNITÉ DE RANGEMENT AUTOMATISÉE INTELLIGENTE

[samurai-by-sam.fr](http://samurai-by-sam.fr)

 INNOVATIVE  
 FRENCH  
 MANUFACTURER

**SAM**  
CRÉATEUR DE SOLUTIONS

# X'Store<sup>®</sup>



- **BUILD YOUR SHOPPING BASKET**  
order, validate, take away  
in just a few seconds



- **SECURE AND DIGITALISE  
YOUR STORE** with WMS-typical  
settings



- **VISIBILITY AND ACCESS ON SITE  
AND REMOTELY 24/7**



- **CONTROL YOUR BUDGET**  
by pooling and paying  
only for what is used



**SAM'URAI**   
UNITÉ DE RANGEMENT AUTOMATISÉE INTELLIGENTE

samurai-by-sam.fr

**INNOVATIVE  
FRENCH  
MANUFACTURER**

## OPERATING PRINCIPLE



1

### OPERATOR IDENTIFICATION

> Name badge



2

### SEARCH & SELECTION OF THE PRODUCT(S) YOU WANT

> Favourites, basket, top10...



3

### RECOVERY OF THE KEY/BADGE

> Open the box automatically



4

### OPEN THE DOOR AND RETRIEVE THE PRODUCT(S) PRESENT IN THE SHOP



5

### CLOSE THE SHOP DOOR



6

### RETURN THE KEY TO THE X'STORE<sup>®</sup>

## TECHNICAL CHARACTERISTICS

Size (mm)	H926 x L490 x P166 mm
Weight Kg	33,2 Kg
Max power	3600W with 16A power supply
Mains power	230 V - 50 Hz EU
Product category	Storage and access management
Equipment class	Class I, OVC II, PD2
Annual energy consumption (excluding options)	< 507kW/An
Airborne noise emissions	<60dB
Type of installation	Wall mounting
Operating temperature	-15°C / 40°C
Hatch opening	Automatic
Max case load	25 kg
SAM colour	RAL 9004 / RAL 3001
Approval basis	2006/42/CE
Approval basis	EN 61000-6-4 / EN 61000-3-2 EN 61000-3-3 / EN 61000-6-2 EN 301 489-1 / EN 301 489-3 EN 301 489-52
Approval basis	IP2X



**SAM**  
CRÉATEUR DE SOLUTIONS